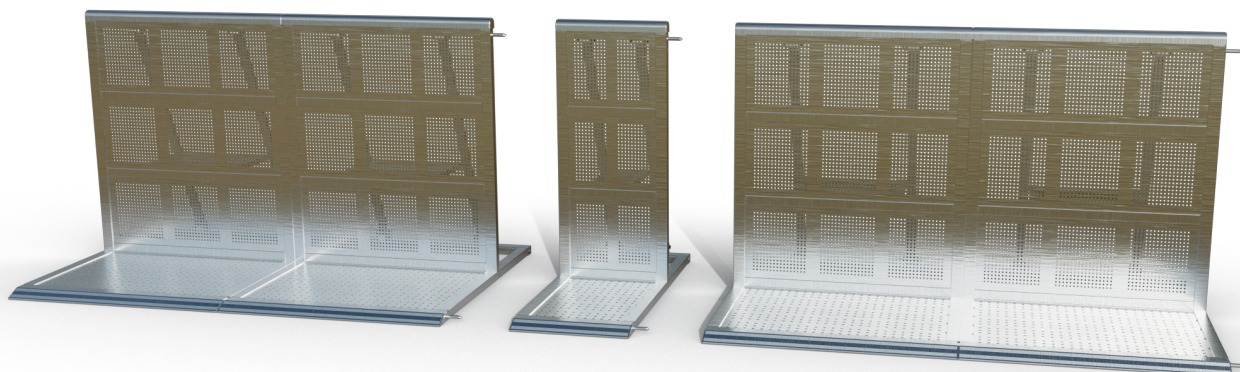


DB Straight 0m50

Dutch Barrier's Straight 0m50 is more than just a smaller version of our Straight 1m00 section. Offered as derivative versions, these units can serve as gate posts or breaker barriers. One variant features hinges and no top pin, while the other has no pins at all—ideal for quick configuration changes during multi-day events.

- a state of the art aluminium barrier system, built for fast setup and optimised crowd control solutions -

About

Dutch Barrier's founders and partners boast over 50 years of experience in high-end manufacturing, layout design, and crowd control solutions. We saw an opportunity to start afresh with an entirely new stage barrier design, preserving the best features and improving upon them where possible.

Why

We believe in quality, safety, and creating an unforgettable experience. The safer an audience is, the more comfortable it will feel at your event.

How

We achieve quality and safety by leveraging 50-plus years of combined original creators' experience to reinvent the to date world's best barrier system from the ground up, making it accessible to anyone who might be in the market for such a system, either to rent or to buy.

What



Dutch Barrier® is a state-of-the-art lightweight aluminium barrier system offering an innovative combination of straights, special sections and storage solutions. Create ingenious crowd control solutions, enjoy quick setups and enhanced handling, and benefit from an equal footprint for every dolly during transport or storage.

Oh, and there's one more thing...

Dutch Barrier® is not just a brand. It's a state-of-the-art engineering company where customer support is an integral part of the mission rather than being hidden behind the impersonality of an online promise.


More information: info@dutchbarrier.nl

Rental & Sales: info@duchtbarrier.services

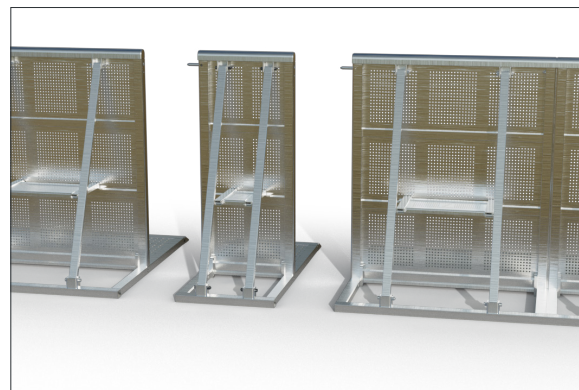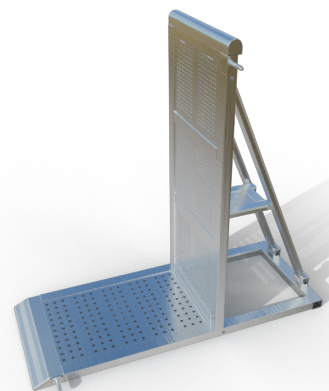

- a safe show for every row -


DB Straight 0m50

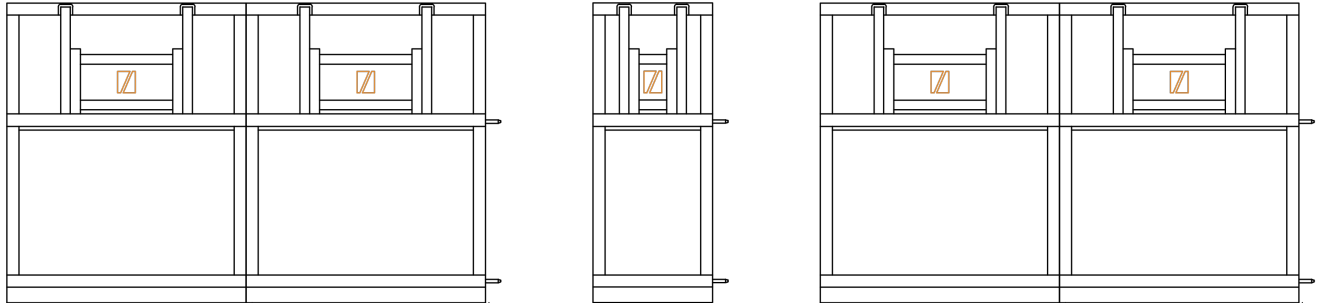


top view

Testing was done at a minimum of 5kN/m pressure at the top rail, following and exceeding the Temporary Demountable Structures Edition 4 guidelines by the Institution of Structural Engineers (ISE). TUV reports for each test are available at Dutch Barrier & Dutch Barrier Services upon request.

- a state of the art aluminium barrier system, built for fast setup and optimised crowd control solutions -

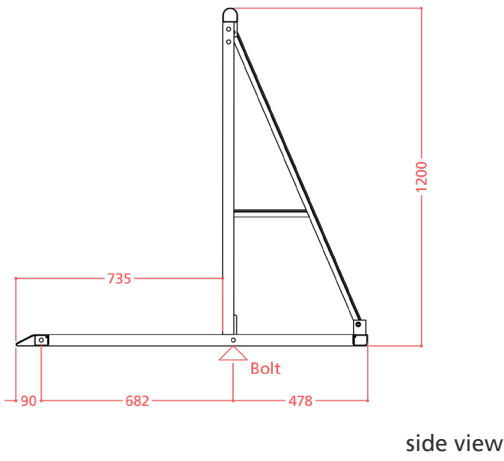

side view



top view

Technical Specs

- A solid (foldable) A-frame welded aluminium construction made out of bespoke extrusion profiles and 4 hinge blocks
- One unit measures 500mm wide, 1250mm deep and 1200mm high
- A rounded top rail and welded end caps for the audience's comfort & and safety
- A punched tread plate prevents liquids from pooling
- An elevated rear step gives security personnel better visibility and makes lifting people in distress over the barrier easier
- Top and bottom pins provide for easy setup and alignment
- Clever design enables handling without the risk of trapped fingers
- Internal solid blocks allow for added strength and easy insertion of pins and bolts, as well as an improved lifespan of the whole unit
- Locking lips maintain the unit's upright stability in unbolted condition
- Straight 0m50 sections interconnect at the bottom on either side by one standard Dutch Barrier bolt, plus one top bolt at the none-gate side
- Also available with black upright, braces and step
- Weight 22,6kg
- Stored and travel per 14 units in a bespoke stainless steel dolly
- Use in high crowd pressure areas: ●●●●● 5/5

- a safe show for every row -